
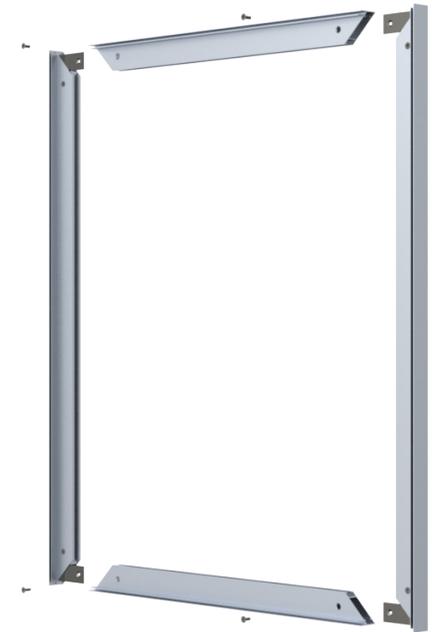
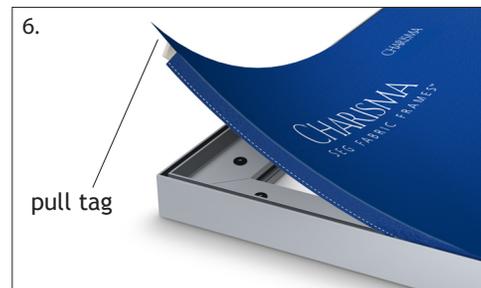
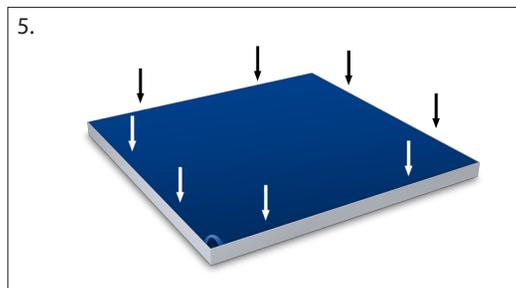
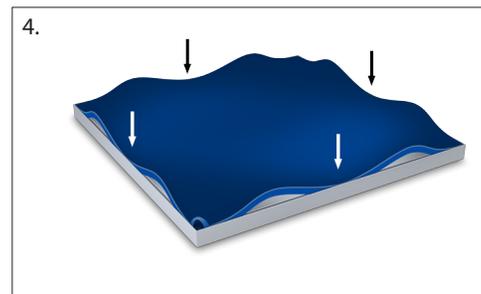
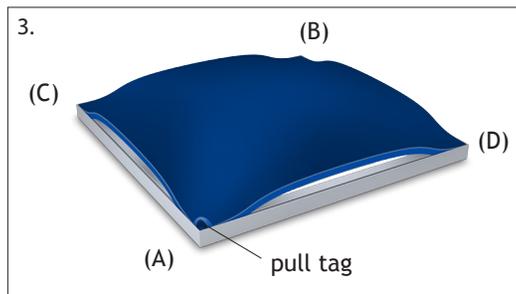


Charisma Frame™ - XSM Series


For proper assembly, it is important to notice that two frame-sides have brackets premounted, and two sides do not.

1. Using the screws provided, attach the two frame-sides without bracket to the first frame side with brackets.
2. Connect the second frame-side with brackets to the assembled portion of the frame.
3. To install the graphic, take Corner A with the pull tag on it and press about 6"-10" of silicone into the frame channel.
Repeat for the opposite Corner B. Repeat for Corner C. Lastly, repeat for the final corner.
4. After all corners are pressed in, press the silicone into the frame channel at the mid-points on all four sides.
This prevents the graphic from bunching up or stretching too much and will ensure a smooth and tight fit.
5. To remove the graphic from the frame, simply pull up on the pull tag.
6. *FOR XSMB SERIES ONLY:* Repeat graphic installation for reverse side (not shown).

NOTE: For assembly purposes, product shown below is a generic frame. Although the number of support bars and size of frame may differ, instructions remain the same.

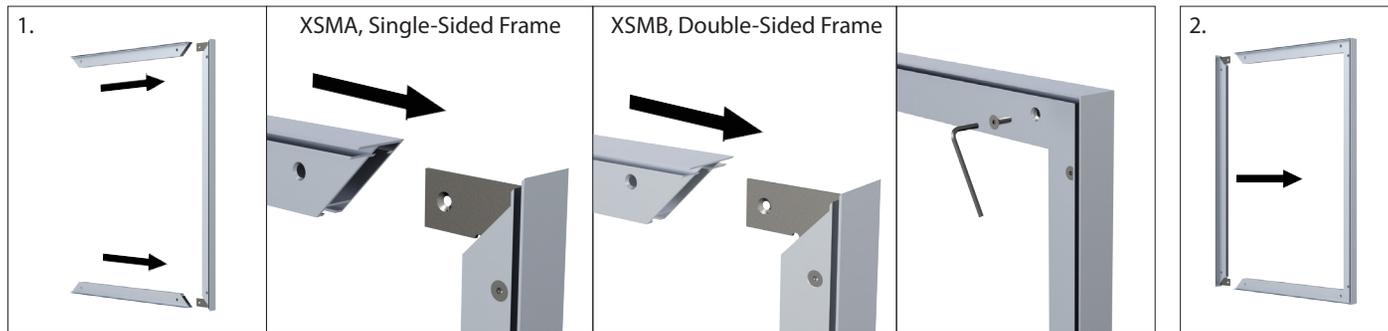

XSMA, Single-Sided Frame

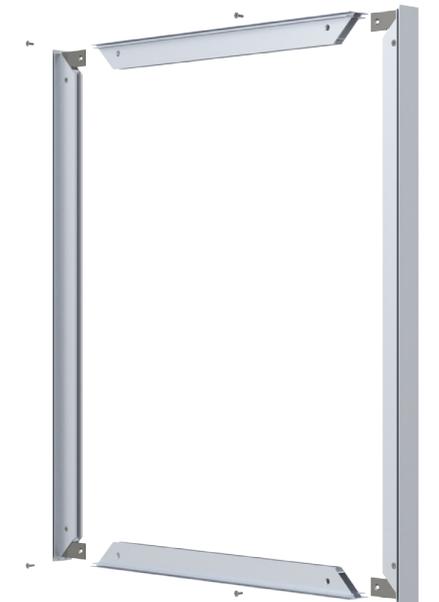

XSMB, Double-Sided Frame

Charisma Frame™ - XSM Series Mounting Options

Standard Bracket for: *XSMA ONLY*

1. Mount top brackets onto wall. Use optional molly anchors if mounting to drywall.
2. Slide frame onto top brackets.
3. Mount bottom brackets to wall to secure frame. Use optional molly anchors if mounting to drywall.

Distortion Bracket for: *XSMA ONLY*

1. Mount top brackets onto wall. Use optional molly anchors if mounting to drywall.
2. Slide frame onto top brackets tighten adjustable screw so that it rests inside the frame channel.
3. Mount bottom brackets to wall to secure frame. Use optional molly anchors if mounting to drywall.
Tighten adjustable screw so that it rests inside the frame channel

Ceiling Mount for: *XSMA (Single-Sided Frame) and XSMB (Double-Sided Frame)*

1. Connect hanging wires to eyebolts on frame.

Base Mount for: *XSMA (Single-Sided Frame) and XSMB (Double-Sided Frame)*

1. Determine base style. Use wrench (provided) and flathead screwdriver to attach base to frame as shown




NOTE: For assembly purposes, product shown below is a generic frame. Although the number of support bars and size of frame may differ, instructions remain the same.




XSMA w/Standard Brackets

XSMA w/Distortion Brackets


Standard Bracket

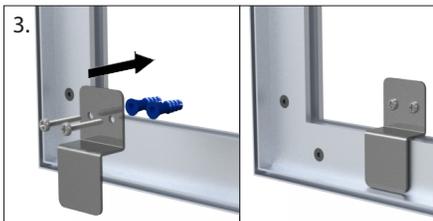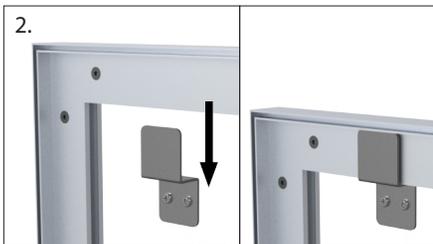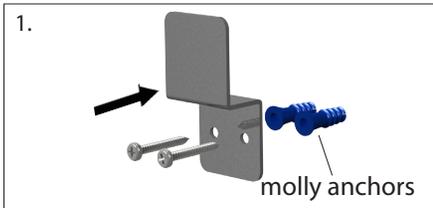


Distortion Bracket

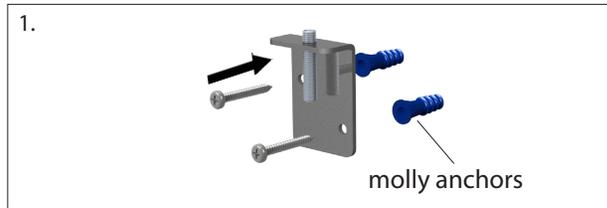

Ceiling Mount



Base Mount

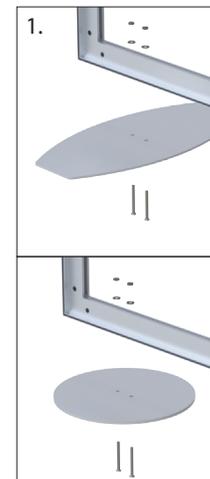

XSMA/XSMB with Base Plates